


Building tolerances for the installation of skylights of the type Glass Skylight FE / FP / FW, Rooflight F100, Smoke Lift F100, Flat Roof Exits Comfort Solo, Duo, Swing and Quadrat.

BKT01 - Status 11/2023

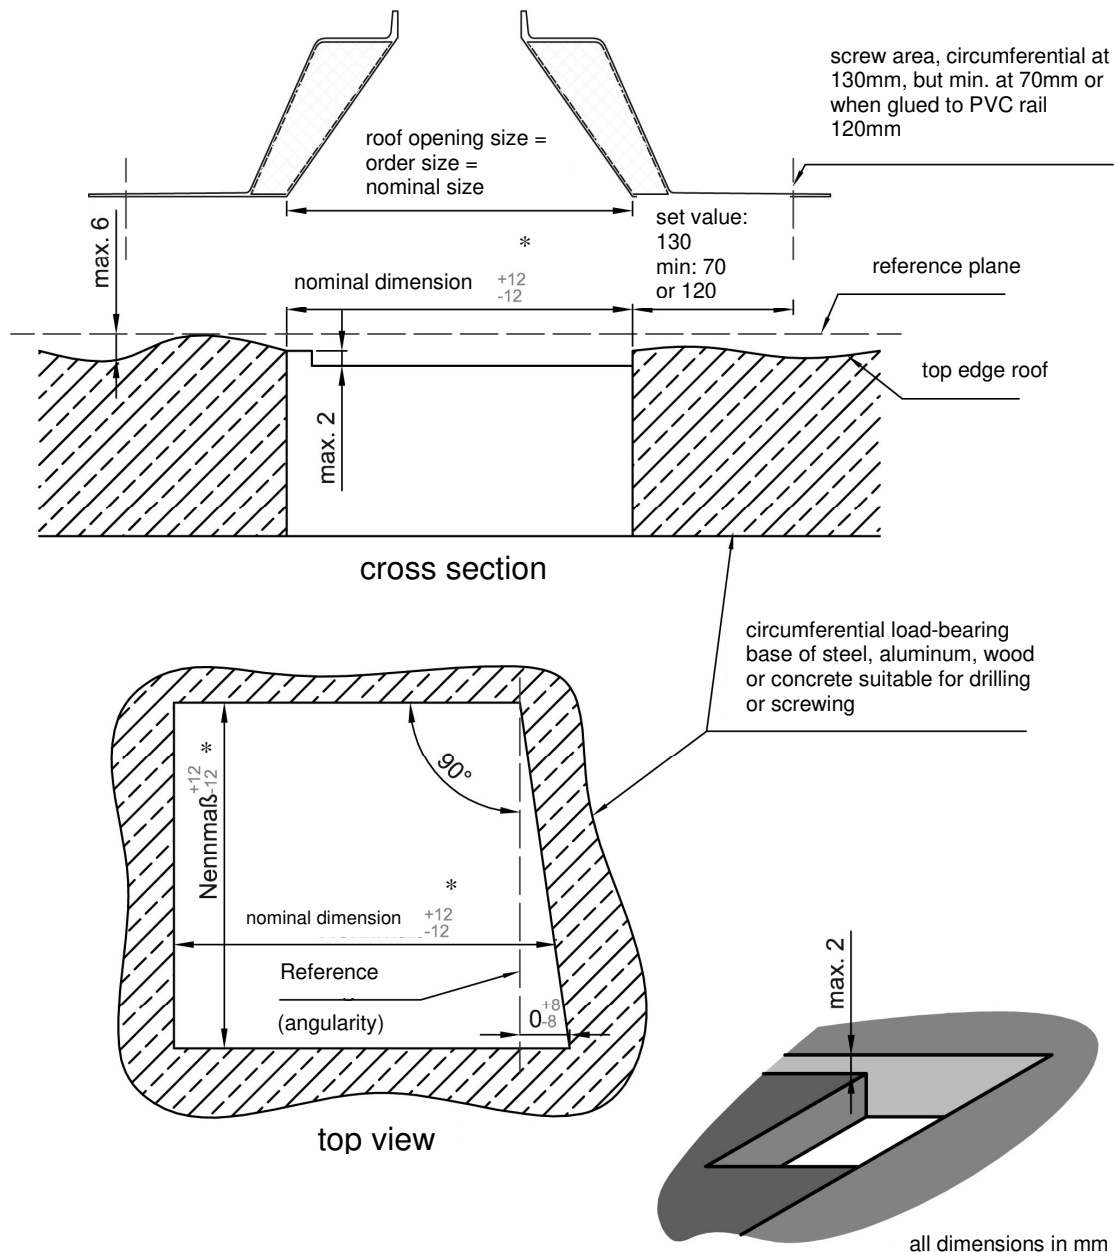

*** Nominal dimension max. 25mm larger than order size of the skylights!**

In case of non-compliance with the above tolerances, functional disturbances such as glazing breakage, stress cracks, leaks and disturbing visual impairments cannot be excluded.

Compliance with these tolerances on the building structure is a precondition for proper installation and secure fastening of the supplied product, but does not necessarily prevent visual irregularities, such as those caused by unequal offset and joint dimensions as well as non-parallel or non-angular edges.